


MQ50 High-Q MLCC

1 Features

- 1) Low ESR, low ESL, high self-resonance frequency, high Q and low noise;
- 2) Ultra-high density ceramic body, stability, and ultra-high reliability;
- 3) No Capacitance shift with Tempearture variance.

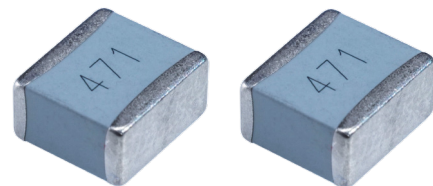

2 Applications

Function: Bypass, Coupling, Tuning, Feedback, Impedance Matching and DC Blocking.
Circuits: MW/RF/Mid-frequency Amplifier, Frequency Mixer, Oscillator, low-noise Amplifier, Filter Network, Timing and Time Delay. Terminal Applications: Phased Array Radars, MRI, Radio Stations, RF Plasma, Laser Devices, Etc.

3 How to order

MQ	50	0505	C0G	2D	101	J	N	D	R	02
Type	Series	Case Size Code	TCC	Rated V.	Nomina Capacitance	Capacitance Tolerance	Termination Type	Thickness Code	Packing	Micro Strip Type
Table1	Table2	Table3	Table4	Table5	Table6	Table7	Table8	Table9	Table10	Table11

Table 1 Product Type

MQ	High-Q MLCC
----	-------------

Table 2 Product Series

50	Applicable to high reliability .The case sizes of 0505, 1111, 2525, 3838, etc. are available.
----	---

Table 3 Case Size Code Dimensions(mm)

Case Size	Termina Type	Drawing	L	W	T(min)	T(max)	B	L _L (Min)	W _L	T _L
1111	MS/MN		2.79 ^{+0.89} _{-0.51}	2.79 ± 0.51	0.76	2.59	/	6.35	2.36 ± 0.15	0.10 ± 0.03
2525	MS/MN		5.84 ^{+0.51} _{-0.25}	6.50 ± 0.25	/	4.19	/	12.7	6.10 ± 0.25	0.10 ± 0.03
3838	MS/MN		9.65 ^{+0.38} _{-0.25}	9.85 ± 0.30	/	4.32	/	19.05	8.89 ± 0.25	0.25 ± 0.13
0505	N/D/TN		1.40 ± 0.64	1.40 ± 0.38	0.51	1.45	0.25 ^{+0.25} _{-0.13}	/	/	/
1111	N/D/TN		2.79 ^{+0.89} _{-0.51}	2.79 ± 0.51	0.76	2.59	0.38 ^{+0.50} _{-0.25}	/	/	/
2525	N/D/TN		5.84 ^{+0.51} _{-0.25}	6.50 ± 0.25	/	4.19	1.0max	/	/	/
3838	N/D/TN		9.65 ^{+0.38} _{-0.25}	9.85 ± 0.30	/	4.32	1.2max	/	/	/

Table4 Temperature Coefficient

Code	Temperature Coefficient	Operating Temperature	Table 5 Rated Voltage					
			1H	50V	2H	500V	3E	2500V
C0G	0±30ppm/°C	-55°C ~125°C	2A	100V	2J	600V	3F	3000V
			2C	150V	2K	800V	3V	3600V
			2D	200V	3A	1000V	3H	5000V
			2E	250V	3C	1500V	3L	7200V
			2F	300V	3D	2000V		

Table6 Nominal Capacitance

EIA Capacitance code in pF.1st two digit are significant figures of capacitance; 3rd digit denotes number of Zeros;
R=decimal point; For examples: 103=10,000pF; 3R9=3.9pF.

MQ50 High-Q MLCC

Table7 Capacitance Tolerance			Table8 Termination Type	
B	±0.1pF	C _R < 10pF	N	Silver/Nickle/Tin
C	±0.25pF		D	Silver/Nickel/Gold (Gold Thickness≥1μm)
D	±0.5pF		Z	Silver/Nickle/Tin&Lead
			TN	Silver/Copper/Tin
F	± 1%	C _R ≥ 10pF	ZN	Silver/Copper/Tin&Lead
G	± 2%		AW	Axial Wire (Silver plated over Copper Wire for 1111,2525,3838)
J	± 5%		BN	Non-Magnetic Axial Wire(Silver plated over Copper Wire)
K	± 10%		RW	Radial Wire(for 1111,2525,3838)
M	± 20%		RN	Non-Magnetic Radial Wire(for 1111,2525,3838)
			MS	Micro Strip(Silver plated over Copper for 1111,2525,3838)
			MA	Micro Strip(Silver for 1111,2525,3838)
			MN	Non-magnetic Micro Strip(Silver plated over Copper)
			FN	Radial Non-magnetic Micro Strip(Silver plated over Copper)
			AR	Axial Micro Strip(Silver for 1111,2525,3838)
			AN	Axial Non-Magnetic Micro Strip(Silver for 1111,2525,3838)

Table9 Thickness Code

Case Size Code	Capacitance (pF)	Thickness Code	Standard Thickness(mm)	Thickness Tolerance(mm)
0505	0.1	A	0.60	± 0.15
	0.2~100	D	1.00	± 0.15
1111	0.1	D	1.00	± 0.15
	0.2	F	1.25	± 0.20
	0.3~0.4	H	1.60	± 0.20
	0.5~1000	M	2.30	± 0.20
2525	1~2700	L	3.20	± 0.40
3838	1~5100	N	3.80	± 0.50

Table10 Packing

B- Bulk with Bag	R- Reel	C- Waffle
------------------	---------	-----------

Table 11 Micro-Strip Style

Blank	01	02
There are φ1mm holes in the center of Micro-strip	Micro-strip with no holes	Micro-strip with cushion function,24.2mm holes for assembly,Distance of 2 holes is 39mm

MQ50 High-Q MLCC

4 MQ 50 Series COG Capacitance Values

0505														
Cap. code	Cap. (pF)	Cap. Tolerance	Rated DC Voltage(V)		Cap. code	Cap. (pF)	Cap. Tolerance	Rated DC Voltage(V)		Cap. code	Cap. (pF)	Cap. Tolerance	Rated DC Voltage(V)	
0R1	0.1	B	150	Extended Voltage 250	2R2	2.2	B、C、D	150	Extended Voltage 250	160	16	F、G、J、K、M	150	Extended Voltage 250
0R2	0.2				2R4	2.4				180	18			
0R3	0.3				2R7	2.7				200	20			
0R4	0.4	B、C			3R0	3.0				220	22			
0R5	0.5				3R3	3.3				240	24			
0R6	0.6				3R6	3.6				270	27			
0R7	0.7	B、C、D			3R9	3.9				300	30			
0R8	0.8				4R3	4.3				330	33			
0R9	0.9				4R7	4.7				360	36			
1R0	1.0	B、C、D			5R1	5.1	B、C、D			390	39	F、G、J、K、M	150	Extended Voltage 250
1R1	1.1				5R6	5.6				430	43			
1R2	1.2				6R2	6.2				470	47			
1R3	1.3				6R8	6.8				510	51			
1R4	1.4				7R5	7.5				560	56			
1R5	1.5				8R2	8.2				620	62			
1R6	1.6				9R1	9.1				680	68			Extended Voltage 250
1R7	1.7				100	10				750	75			
1R8	1.8				110	11	820			82	F、G、J、K、M			
1R9	1.9				120	12	910			91				
2R0	2.0				130	13	101			100				
2R1	2.1				150	15								
1111														
0R1	0.1	B	500	Extended Voltage 1500	4R7	4.7	B、C、D	500	Extended Voltage 1500	750	75	F、G、J、K、M	500	Extended Voltage 1500
0R2	0.2				5R1	5.1				820	82			
0R3	0.3	B、C			5R6	5.6				910	91			
0R4	0.4				6R2	6.2				101	100			Extended Voltage 1000
0R5	0.5	B、C、D			6R8	6.8				111	110			
0R6	0.6				7R5	7.5				121	120			
0R7	0.7				8R2	8.2				131	130			Extended Voltage 300
0R8	0.8	B、C、D			9R1	9.1				151	150			
0R9	0.9				100	10				161	160			
1R0	1.0	B、C、D			110	11	F、G、J、K、M			181	180	F、G、J、K、M	200	Extended Voltage 600
1R1	1.1				120	12				201	200			
1R2	1.2				130	13				221	220			
1R3	1.3				150	15				241	240			
1R4	1.4				160	16				271	270			
1R5	1.5				180	18				301	300			
1R6	1.6				200	20				331	330			
1R7	1.7				220	22				361	360			
1R8	1.8				240	24				391	390			
1R9	1.9				270	27				431	430			
2R0	2.0				300	30				471	470			
2R1	2.1				330	33				511	510			
2R2	2.2				360	36				561	560			
2R4	2.4				390	39				621	620			
2R7	2.7				430	43				681	680			
3R0	3.0				470	47				751	750			
3R3	3.3				510	51				821	820			
3R6	3.6				560	56				911	910			
3R9	3.9				620	62				102	1000			
4R3	4.3				680	68								

MQ50 High-Q MLCC

2525														
Cap. code	Cap. (pF)	Cap. Tolerance	Rated DC Voltage(V)		Cap. code	Cap. (pF)	Cap. Tolerance	Rated DC Voltage(V)		Cap. code	Cap. (pF)	Cap. Tolerance	Rated DC Voltage(V)	
1R0	1.0	B、C、D	2500	Extended Voltage 3600	120	12	F、G、J、K、M	2500	Extended Voltage 3600	221	220	F、G、J、K、M	2500	Extended Voltage 3000
1R1	1.1				130	13				241	240			
1R2	1.2				150	15				271	270			
1R3	1.3				160	16				301	300			
1R4	1.4				180	18				331	330			
1R5	1.5				200	20				361	360			
1R6	1.6				220	22				391	390			
1R7	1.7				240	24				431	430			
1R8	1.8				270	27				471	470			
1R9	1.9				300	30				511	510			
2R0	2.0				330	33				561	560			
2R1	2.1				360	36				621	620			
2R2	2.2				390	39				681	680			
2R4	2.4				430	43				751	750			
2R7	2.7				470	47				821	820			
3R0	3.0				510	51				911	910			
3R3	3.3				560	56				102	1000			
3R6	3.6				620	62				112	1100			
3R9	3.9				680	68				122	1200			
4R3	4.3				750	75				152	1500			
4R7	4.7				820	82				182	1800			
5R1	5.1				910	91				202	2000			
5R6	5.6				101	100				222	2200			
6R2	6.2				111	110				242	2400			
6R8	6.8				121	120				272	2700			
7R5	7.5	131	130											
8R2	8.2	151	150											
9R1	9.1	161	160											
100	10	F、G、J、K、M		181	180									
110	11		201	200										

3838														
1R0	1.0	B、C、D	3600	Extended Voltage 7200	130	13	F、G、J、K、M	3600	Extended Voltage 7200	271	270	F、G、J、K、M	3600	
1R1	1.1				150	15				301	300			
1R2	1.2				160	16				331	330			
1R3	1.3				180	18				361	360			
1R4	1.4				200	20				391	390			
1R5	1.5				220	22				431	430			
1R6	1.6				240	24				471	470			
1R7	1.7				270	27				511	510			
1R8	1.8				300	30				561	560			
1R9	1.9				330	33				621	620			
2R0	2.0				360	36				681	680			
2R1	2.1				390	39				751	750			
2R2	2.2				430	43				821	820			
2R4	2.4				470	47				911	910			
2R7	2.7				510	51				102	1000			
3R0	3.0				560	56				112	1100			
3R3	3.3				620	62				122	1200			
3R6	3.6				680	68				152	1500			
3R9	3.9				750	75				182	1800			
4R3	4.3				820	82				202	2000			
4R7	4.7				910	91				222	2200			
5R1	5.1				101	100				242	2400			
5R6	5.6				111	110				272	2700			
6R2	6.2				121	120				302	3000			
6R8	6.8				131	130				332	3300			
7R5	7.5	151	150	362	3600									
8R2	8.2	161	160	392	3900									
9R1	9.1	181	180	432	4300									
100	10	F、G、J、K、M		201	200	472	4700							
110	11		221	220	512	5100								
120	12		241	240										

MQ50 High-Q MLCC

5 Electrical Specifications&Test Conditions

Item	Test Conditions (25°C ±2°C)	Electrical Specifications
Capacitance		Capacitance is up to requirements
Dissipation Factor tanδ	Test Frequency: $C_R \leq 1000\text{pF}, 1\text{MHz} \pm 10\%$ $C_R > 1000\text{pF}, 1\text{kHz} \pm 10\%$ Test Voltage: $1.0\text{Vrms} \pm 0.2\text{Vrms}$	$C_R \geq 50\text{pF}, \tan\delta \leq 0.15\%$; $5\text{pF} < C_R < 50\text{pF}, \tan\delta \leq 1.5(150/C_R + 7) \times 10^{-4}$; $C_R \leq 5\text{pF}$, No test.
Insulation Resistance Ri	Test Voltage: Rated Voltage or 500V (whichever is smaller) Endurance time: $2\text{min} \pm 5\text{s}$	$R_i (25^\circ\text{C}) \geq 100000\text{M}\Omega$ or $1000\text{M}\Omega \cdot \mu\text{F}$ (whichever is smaller); $R_i (125^\circ\text{C}) \geq 10000\text{M}\Omega$ or $100\text{M}\Omega \cdot \mu\text{F}$ (whichever is smaller).
Withstanding Voltage	Test Voltage: $U_R > 1250\text{V}, 1.2U_R$; $500\text{V} < U_R \leq 1250\text{V}, 1.5U_R$; $U_R \leq 500\text{V}, 2.5U_R$ Endurance time: $5\text{s} \pm 1\text{s}$ Surge current $\leq 50\text{mA}$	No breakdown, flashover or visible damages

MQ50 High-Q MLCC

6 Reliability Characteristics&Test Conditions

Item	Test Conditions	Electrical Specifications
Thermal Shock	Upper limit: 125°C ; Lower limit: -55°C ; Recycl times: 5; Endurance: 30min.	No visible damage to appearance. Capacitance change less than $\pm 1\%$ or $\pm 1\text{pF}$ (Whichever is wider).
Resistance to soldering heat	Slot Weld Preheat at $110 \sim 140^\circ\text{C}$, endure 30s~60s. Temperature: $260^\circ\text{C} \pm 5^\circ\text{C}$; Dip time: $10\text{s} \pm 1\text{s}$; Dip depth: 10mm; Dip time: 1time; Recover: 6h~24h.	No damagers, cracks or exposure of inner electrodes. The peeling of Termination coating is less than 25%. Capacitance values are up to the permissible capacitance tolerance range.
Resistance to Humidity in Steady State	Temperature: $40^\circ\text{C} \pm 2^\circ\text{C}$; Relative: 90%~95%; Endure: 21d($500 + 10$)h; Withstanding Voltage Test within 15min after test finish: $U_R, 5\text{s}$; Recover: 6h~24h.	No visible damages, Marks are clear; Capacitance: C ompared with initial value, $\Delta C / C \leq 2\%$ or $< 1\text{pF}$, whichever is wider; Dissipation factor: No exceeds the initial value or 2x initial requirements, whichever is higher; Insulation resistance: $R_i \geq 25000\text{M}\Omega$ or $R_i \times C_R \geq 250\text{s}$, whichever is lower.
High-temperature Life Test	Endurance: 2000h for 2525 3838, Other case size: 1000h; Test temperature: 125°C ; Test Voltage: $U_R > 1250\text{V}, U_R$; $500 < U_R \leq 1250\text{V}, 1.2U_R$; $U_R \leq 500\text{V}, 2U_R$.	No visible damages, Marks are clear; Capacitance: C ompared with initial value, $\Delta C / C \leq 2\%$ or 1pF , whichever is higher; Dissipation factor: No exceeds the initial value or 2x initial requirements, whichever is higher; Insulation resistance: $R_i \geq 40000\text{M}\Omega$ or $R_i \times C_R \geq 400\text{s}$, whichever is lower.

7 Performance Data

Temperature Coefficient

Capacitance VS Temperature

